

ROMA

GLAZED PORCELAIN | FLOOR & WALL TILES

STONE EFFECT TILES



JOHNSON • TILES
Since 1901





www.johnson-tiles.com

ROMA

Featuring shards of colour ranging from rusted red to sapphire blue, the Roma range brings a sense of playfulness. With base colours of Dark, White, or Silver Grey, Roma is perfect to bring a youthful sense of fun. Dynamic and different, Roma is available in a 250x220mm hexagon in White or Silver Grey, or in 660x660mm in all colours.

Front Cover Image: Dark Natural 660x660mm - RMA03N

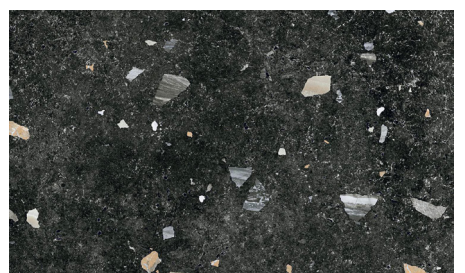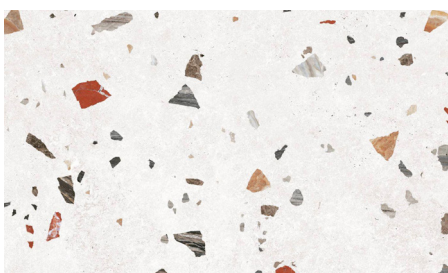



Roomset Photography






Colours & Product Codes

V2: Low to Moderate Shade Variation



WHITE

N RMA01N **PEI: IV** **LRV: 72**




SILVER GREY

N RMA02N **PEI: IV** **LRV: 56**




WHITE

N RMA01N **PEI: IV** **LRV: 72**

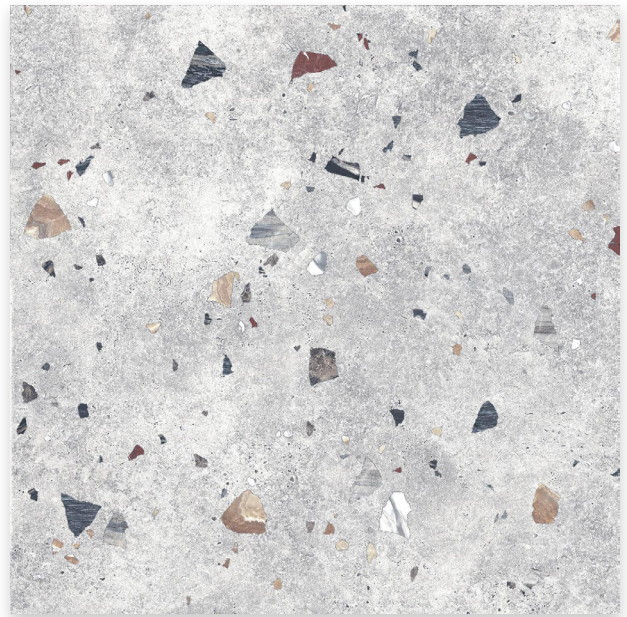

SILVER GREY

N RMA02N **PEI: IV** **LRV: 56**

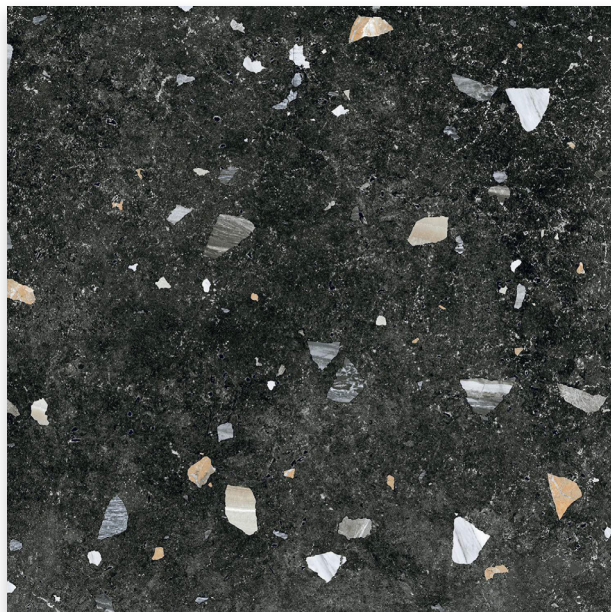


DARK

N RMA03N **PEI: IV** **LRV: 16**




Sizes, Finishes & Availability

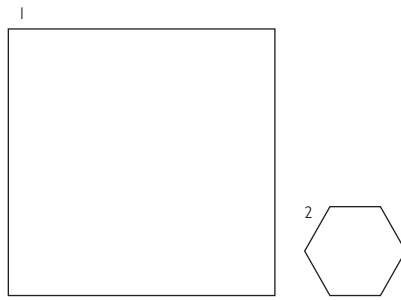

| # | Size | Finish | Colour Availability | Thickness | Pieces/Box | Coverage/Box | Weight/Box |
|---|-------------------|---------|--------------------------|-----------|------------|---------------------|------------|
| 1 | 660x660mm | Natural | All Colours Shown | 10mm | 3 Tiles | 1.31 m ² | 34.45 kg |
| 2 | 250x220mm Hexagon | Natural | White & Silver Grey Only | 10mm | 25 Tiles | 1.04 m ² | 24.00 kg |

Note: All sizes indicated are metric modular. All dimensions are in millimetres. All sizes shown are nominal. For the most up-to-date availability information, please visit our website. All LRV results are from Johnson Tiles' internal test reports and are to be used for guidance only. LRV: Light Reflectance Value.

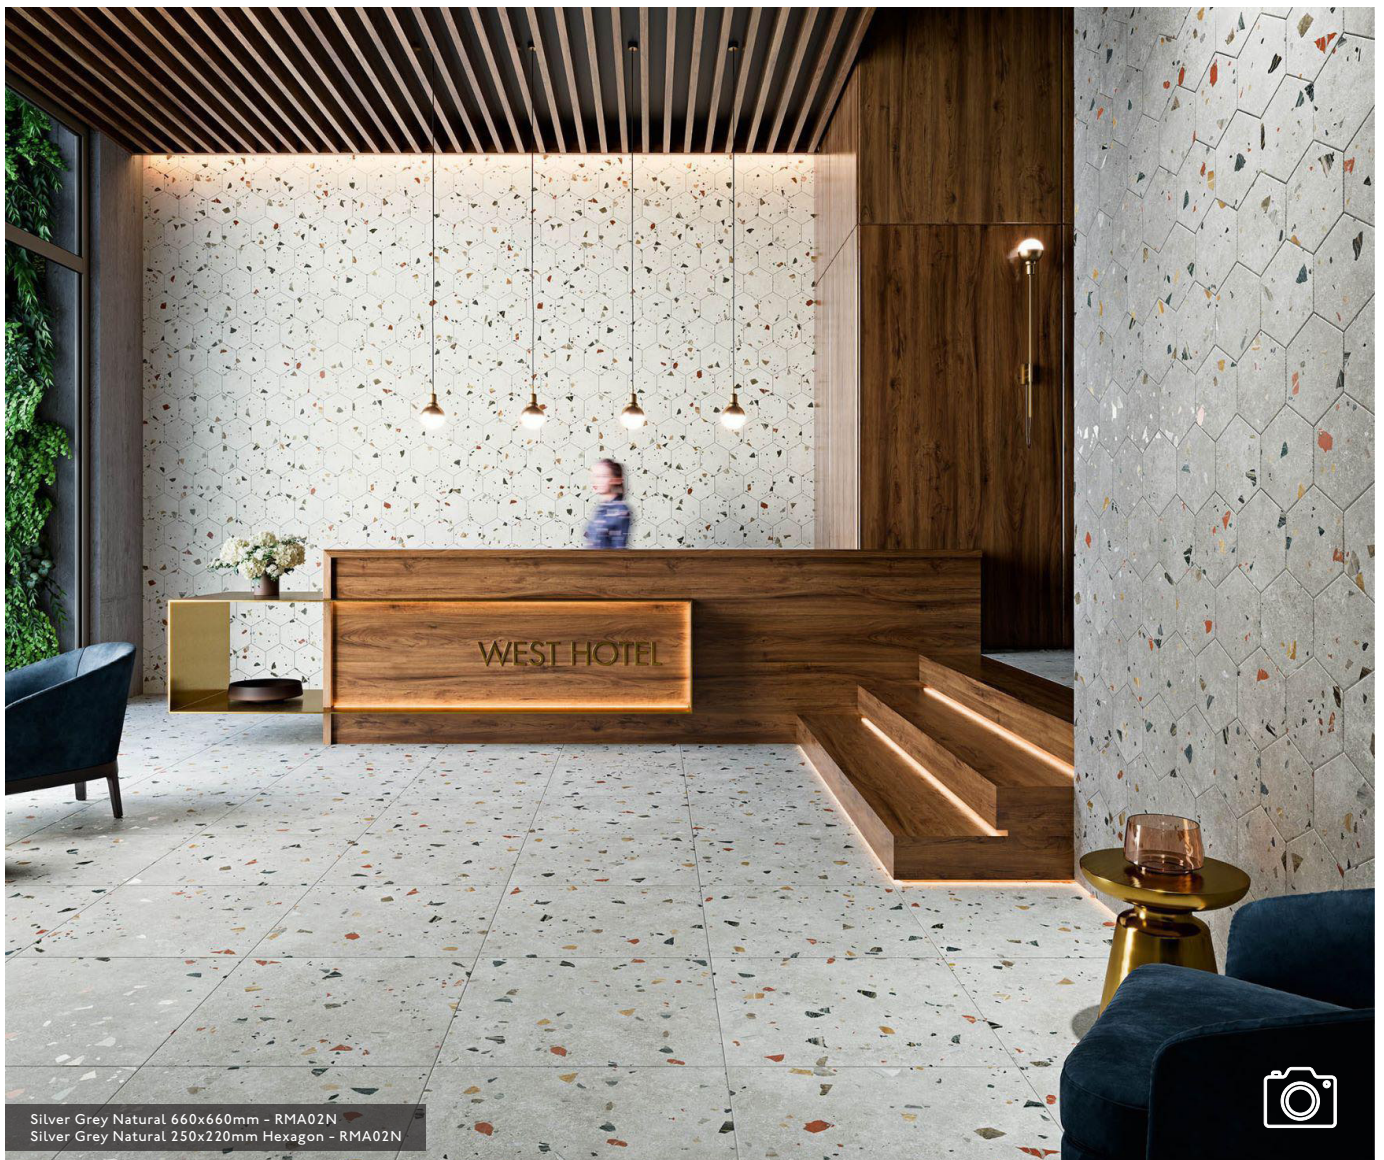

Silver Grey Natural 660x660mm - RMA02N
Silver Grey Natural 250x220mm Hexagon - RMA02N





Technical Data

Specification

| Range | Size | Wall Suitability | Floor Suitability | Wet Barefoot | CSV | Material |
|-------|-----------------|---------------------|-------------------|--------------|-----|------------------------|
| Roma | All Sizes Shown | Internal & External | Internal Only | - | V2 | Glazed Porcelain [Bla] |

Floor Values

| Finish | Colour | PTV (4S) | PTV (TRL) | R Value | Wet Ramp | PEI | Traffic |
|---------|-------------------|--------------------|-----------|---------|----------|-----|------------|
| Natural | All Colours Shown | Dry 36+ Wet 0 - 24 | - | R9 | - | IV | Commercial |

Note: Due to the manufacturing process of all floor tiles there may be small variations in slip resistance. Given this, please refer to our website for the most up-to-date information. The slip resistance properties of a surface can only be maintained with the implementation of an effective regular cleaning and maintenance regime. The frequency of cleaning should be determined by the property manager based on the potential level of surface contaminants. The need for an additional regular cleaning and maintenance regime is further heightened when tiles are used for external floor and wet barefoot applications. PTV: Pendulum Test Value.

Physical Properties

| Test/Standard | Requirement | Test Result | Test/Standard | Requirement | Test Result |
|--|-----------------------------------|--------------|--|----------------------------|---------------------------------|
| Length / Width EN ISO 10545 - 2 | $\pm 0.6\% \leq \pm 2\text{mm}$ | Pass | Modulus of Rupture EN ISO 10545 - 4 | Min. 35N / mm ² | $\geq 35\text{N} / \text{mm}^2$ |
| Thickness EN ISO 10545 - 2 | $\pm 5\% \leq \pm 0.5\text{mm}$ | Pass | Thermal Shock EN ISO 10545 - 9 | Pass | Pass |
| Straightness of Side EN ISO 10545 - 2 | $\pm 0.5\% \leq \pm 1.5\text{mm}$ | Pass | Frost Resistance EN ISO 10545 - 12 | Resistant | Resistant |
| Rectangularity EN ISO 10545 - 2 | $\pm 0.5\% \leq \pm 2\text{mm}$ | Pass | Chemical Resistance EN ISO 10545 - 13 | Min. Class B | Class A |
| Surface Flatness EN ISO 10545 - 2 | $\pm 0.5\% \leq \pm 0.5\text{mm}$ | Pass | Stain Resistance EN ISO 10545 - 14 | Min. Class 3 | Class 5 |
| Water Absorption EN ISO 10545 - 3 | $\leq 0.5\%$ | $\leq 0.5\%$ | Fire Rating | - | Class A I FL Non Combustible |
| Weight / M ² | 26.37 kg 10mm thick | | | | |

Note: All products are classed as Bla - Glazed Porcelain. All products conform to BS EN 14411.

Important Information

During the manufacturing process of ceramic, vitrified and porcelain tiles, some variation in shade and pattern can occur. Before fixing any tiles; several boxes should be opened and their contents mixed to ensure that size, colour, shade and patterning are acceptable. The tiles shown are quality products and conform to the physical properties listed below.

- All sizes shown are metric modular.
- For specific suitability and fit-for-purpose details please contact our technical helpline.
- Johnson Tiles cannot accept responsibility for any tiles that have been fixed.
- Every effort has been made to ensure the accuracy of the information given.
- Johnson Tiles reserves the right to change specifications and availability without prior notice.
- Nothing in these statements does or will affect the statutory rights of the consumer.

© Johnson Tiles, Johnson, Absolute and Material Lab are registered trademarks and together with Kerastar and product names are the trademarks of H&R Johnson Tiles Limited and licensed to Norcros Group (Holdings) Limited trading as Johnson Tiles. © 2021 Johnson Tiles. All rights reserved.



For more information about Roma or any
of our other product ranges simply visit
www.johnson-tiles.com |      

Where To Find Us

Johnson Tiles

Harewood Street,
Tunstall,
Stoke on Trent,
Staffordshire,
ST6 5JZ

Tel: +44 (0)1782 575 575
Fax: +44 (0)1782 577 377
Email: info@johnson-tiles.com

Samples Enquiries

Tel: +44 (0)1782 524 043
Fax: +44 (0)1782 577 379
Email: samples@johnson-tiles.com

Technical Helpline

Tel: +44 (0)1782 524 111
Fax: +44 (0)1782 577 379
Email: techadvice@johnson-tiles.com

JOHNSON • TILES
Since 1901